

# SAW Filter

# T3P



RoHS compliant



Pb free pins



actual size



Ø 9.35 mm max.



actual size




Ø 9.35 mm max.

## T3P / RF

## T3P / IF

Type	SAW Filter		SAW Filter	
Frequency	130.0 ~ 2400.0 MHz		30.0 ~ 550.0 MHz	
Input/Output	Single ended / Balanced	Balanced I/O	Single ended / Balanced	Balanced I/O
Bandwidth	0.1 MHz ~ 85.0 MHz		0.015 MHz ~ 28.0 MHz	
Operating Temp Range	-40 ~ +85 °C		-40 ~ +85 °C	
Typical Applications	Pager, Cordless Phone, GPS, FRS, Cable Modem, RKE, ISM, GSM, EGSM, CDMA, SONET, Wireless Microphone		WLAN, Cable Modem, AV-Sender, DECT, GSM, CDMA	
Features	<ul style="list-style-type: none"> <li>■ metal package</li> <li>■ excellent reliability and shock resistance</li> <li>■ TO-39 package</li> </ul>			
Typical Frequencies	315.0 MHz 315.5 MHz		433.92 MHz 479.5 MHz 480.0 MHz	

## Dimensions

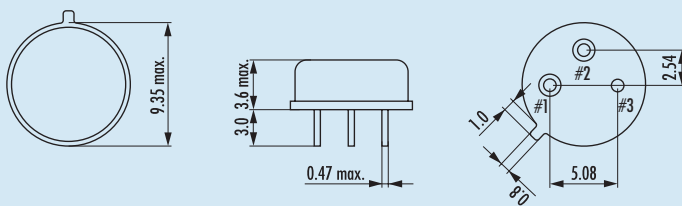

pin connection (example):

- #1: Input
- #2: Output
- #3: Ground

Note: please refer to individual datasheet for the actual pin connection and exact dimensions and tolerances