

SAW Filter

T4P



RoHS compliant



Pb free pins



actual size



Ø 9.14 mm



actual size




Ø 9.14 mm

T4P / IF

T4P / Dual

Type	SAW Filter		SAW Filter	
Frequency	30.0 ~ 550.0 MHz		479.5 ~ 1960.0 MHz	
Input/Output	Single ended / Balanced	Balanced I/O	Single ended / Balanced	Balanced I/O
Bandwidth	0.015 MHz ~ 28.0 MHz		18.0 MHz ~ 75.0 MHz	
Operating Temp Range	-40 ~ +85 °C		-40 ~ +85 °C	
Typical Applications	WLAN, Cable Modem, AV-Sender, DECT, GSM, CDMA		Custom made	
Features	<ul style="list-style-type: none"> ■ metal package ■ excellent reliability and shock resistance ■ TO-39 package 			
Typical Frequencies	433.92 MHz 479.5 MHz 480.0 MHz		479.5 MHz	

Dimensions

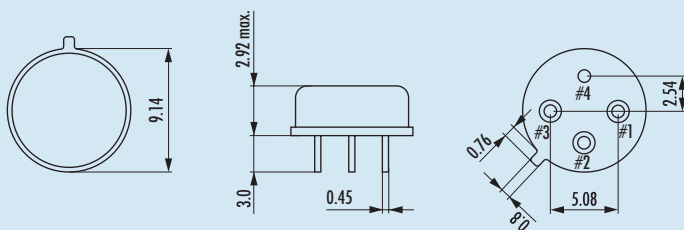

pin connection (example):

- #1: Input
- #2: Output
- #3: Output
- #4: Ground

Note: please refer to individual datasheet for the actual pin connection and exact dimensions and tolerances