

<b>Specification</b>	<b>AXLE114</b>	Issue: 01	Date:2009-12-07
----------------------	----------------	-----------	-----------------

**Oscillator type : TCXO in gullwing SMD package**

Parameter	min.	typ.	max.	Unit	Condition
<b>Frequency range</b>	10		50	MHz	Clipped Sine wave
	10		50	MHz	Sine wave
	1.25		50	MHz	HCMOS
<b>Frequency stability</b>				ppm	
vs. temperature	± 0.5 ppm to ± 5 ppm			ppm	See tables 1 & 2
vs. supply voltage variation		± 0.1	± 0.3	ppm	V <sub>S</sub> ± 5 %
vs. load change			± 0.2	ppm	Load ± 10 %
long term (aging) per year			± 1	ppm	@+40°C
<b>Frequency adjustment range</b>					
Mechanical (internal trimmer)	± 3			ppm	Option 1 = blank
Electronic Frequency Control (EFC)	± 5			ppm	Option 1 = "V"
EFC voltage V <sub>C</sub>	0.15	1.65	3.15	V	Option 2 = "3"
	0.5	2.5	4.5	V	Option 2 = "5"
EFC slope (Δf / ΔV <sub>C</sub> )	positive				
EFC input impedance	100			kΩ	
<b>RF output</b>					
Signal waveform	Clipped Sine wave Sine wave HCMOS				Option 3 = "C" Option 3 = "S" Option 3 = "H"
Load	10 kΩ    10 pF 50 Ω 15 pF				Option 3 = "C" Option 3 = "S" Option 3 = "H"
Amplitude	0.8			V p-p	Option 3 = "C" / 3.3 V
	1.0			V p-p	Option 3 = "C" / 5.0 V
		0		dBm	Option 3 = "S" (3.3 V)
		10		dBm	Option 3 = "S" (5 V)
	According to relevant Logic Standard				Option 3 = "H"
<b>Supply voltage V<sub>S</sub></b>	3.15	3.3	3.45	V	Option 2 = "3"
	4.75	5.0	5.25	V	Option 2 = "5"
<b>Current consumption (Note 3)</b>	2 ~ 10			mA	Option 3 = "C"
	12 ~ 30			mA	Option 3 = "S"
	15 ~ 40			mA	Option 3 = "H"
<b>Storage temperature range</b>	-45		+90	°C	
<b>Enclosure (see drawing) L x W x H</b>	11.7 x 9.9 x 4.3 max.			mm	
<b>Packing</b>	Tape & reel				
<b>Handling and Testing</b>	In accordance with AXAN-011				www.axtal.com
<b>Processing</b>	In accordance with AXAN-012				www.axtal.com

**Notes:**

1. Terminology and test conditions are according to IEC standard IEC60679-1, unless otherwise stated
2. All combinations of options might not be available. Please consult factory
3. Depending on frequency and supply voltage

## Frequency Stability over Temperature

Table 1

Code4	Stability
05	± 0.5
10	± 1.0
15	± 1.5
20	± 2.0
25	± 2.5
30	± 3.0
35	± 3.5
50	± 5.0

Table 2



Lower Temperature		Upper Temperature	
Code5	Temp/°C	Code5	Temp/°C
0	0	A	+50
1	-10	B	+60
2	-20	C	+70
3	-30	D	+75
4	-40	E	+80
		F	+85

### Ordering Code:

Part number	Option 1	Option 2	Option 3	Option 4	Option 5	Frequency [MHz]
	EFC	Supply Voltage	Output	Stability	Temp. range	
<b>AXLE114</b>	_ or "V"	5 or 3	C, S, H	See tables 1 & 2		10.000

**Example: AXLE114V-5-C-10-3D -10.000 MHz**

### Enclosure drawing:

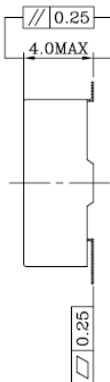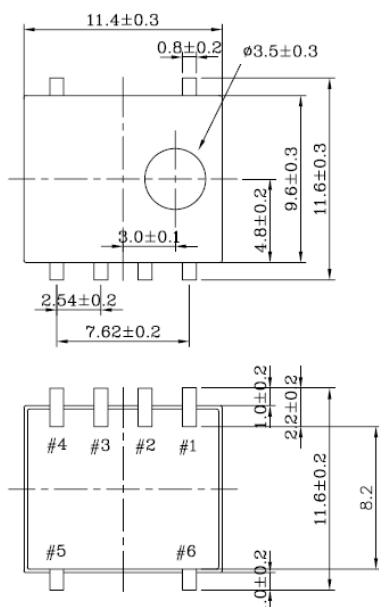

### Pin connections

Pin #	Symbol	Function
1	V <sub>S</sub>	Supply Voltage
2	V <sub>C</sub>	Voltage Control (EFC)
3	GND	Ground
4	RF OUT	RF Output
5	GND	Ground
6	GND	Ground